

TOROIDAL INDUCTOR



P11T500 SERIES




- RoHS Compliant Product
- Operating Temp: -55°C to +105°C
- Inductance test @ 1KHz, 0.1V_{RMS}
- I_{RATED}: Δ40°C temperature rise max
- Add -V for Vertical Mount, -H for Horizontal Mount after part number


ELECTRICAL SPECIFICATION @ 25°C

Part Number	L (μH) ±20%	Rated Current (A)	R _{DC} Max (mΩ)	DIM. A NOM.	DIM. B NOM.	DIM. C NOM.
P11T500-						
R3	0.3	28.5	1.0	0.35	0.60	0.059
R5	0.5	24.7	1.2	0.35	0.60	0.059
R8	8	22.1	1.4	0.35	0.60	0.059
1R2	1.2	20.2	1.7	0.35	0.60	0.059
1R5	1.5	18.7	2.0	0.35	0.60	0.059
2R0	2	15.6	2.7	0.34	0.59	0.053
2R7	2.7	14.7	3.0	0.34	0.59	0.053
3R3	3.3	11.1	5.3	0.33	0.58	0.042
3R9	3.9	10.5	5.9	0.33	0.58	0.042
4R7	4.7	10.1	6.4	0.33	0.58	0.042
5R6	5.6	9.7	6.9	0.33	0.58	0.042
6R8	6.8	7.2	13.0	0.31	0.56	0.034
	L=±15%					
8R2	8.2	7.0	14.0	0.31	0.56	0.034
100	10	6.6	15.0	0.31	0.56	0.034
120	12	6.4	16.0	0.31	0.56	0.034
150	15	4.7	29.0	0.29	0.53	0.027
180	18	4.5	32.0	0.29	0.53	0.027
220	22	4.3	35.0	0.29	0.53	0.027
270	27	4.1	39.0	0.29	0.53	0.027
330	33	3.5	54.0	0.29	0.53	0.024
390	39	3.3	59.0	0.29	0.53	0.024
470	47	3.2	64.0	0.29	0.53	0.024

Mechanical

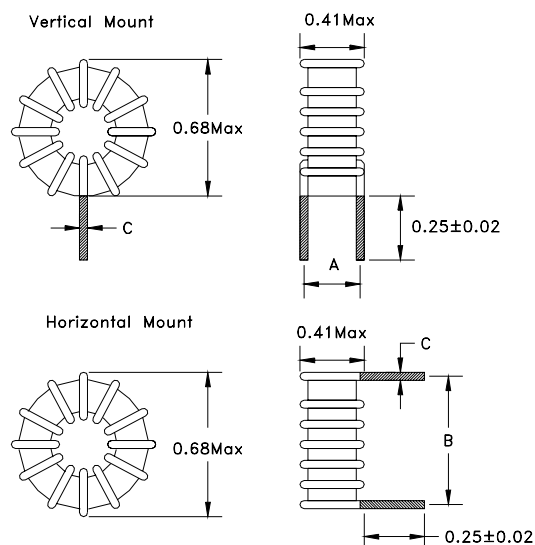

Schematic



Dimensions

Unless otherwise specified, all tolerances are:

inch: .XX : ± 0.008 .XXX : ±0.004
mm: X,X : ± 0,20 X,XX : ±0,10

Product performance is limited to specified parameter. Data is subject to change without prior notice.

P11T500-XXX
0547JW

2463 208th, Ste. 205
Torrance, CA 90501

Phone: (310)533-1455
Fax: (310)533-1853

<http://www.mpsind.com>
Email: sales@mpsind.com