

SHIELDED SMD POWER INDUCTOR



PS63 SERIES




- High current inductor for Voltage Regulated Module (VRM)
- Good for DC/DC converter and switch-mode power supply applications
- High current in compact package
- Operating temperature: -55°C to +120°C
- RoHS Compliant Product

ELECTRICAL PARAMETERS @ 25°C

PART NUMBER	L ±20% (μH)	I _{SAT} (A) Max	I _{RMS} (A) Max	DCR (mΩ) Max
PS63-				
R47M	0.47	19.00	15.0	3.4
R68M	0.68	18.50	13.0	4.6
R82M	0.82	18.00	10.5	6.6
1R0M	1.00	17.50	9.5	6.9
1R5M	1.50	16.00	9.0	10.7
2R2M	2.20	14.50	8.0	13.9
3R3M	3.30	11.00	6.0	28.2
4R7M	4.70	7.50	5.0	38.8
6R8M	6.80	6.50	4.5	48.9
8R2M	8.20	6.00	4.0	55.9
100M	10.00	5.00	3.5	84.0

Mechanical

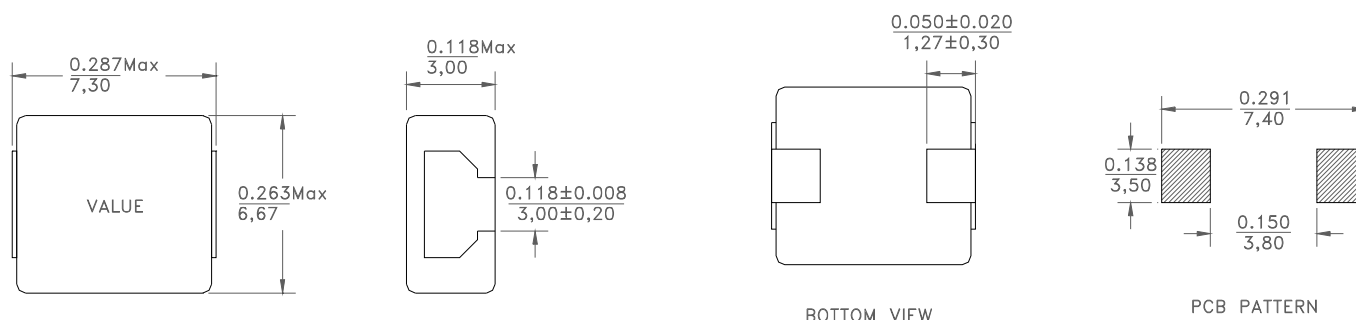

UNIT = inch/mm
 Unless otherwise specified, all tolerances are:
 inch: .XX : ± 0.015 .XXX : ± 0.010
 mm: X,X : ± 0,38 X,XX : ± 0,25

Product performance is limited to specified parameter. Data is subject to change without prior notice.

PS63-SERIES
0852AL

2570 W. 237th Street, Suite B
 Torrance, CA 90505

Tel: (310) 325-1043
 Fax: (310) 325-1044

www.mpsind.com
 sales@mpsind.com