

TOROIDAL POWER TRANSFORMER



P8T SERIES






- High efficiency, low noise emission, quiet operation, small size
- Part No -XXX assigned by MPS based on custom configuration
- Standard Operating Temperature: 0°C to +70°C
(extended operating temperature available)
- RoHS Compliant Product
- UL, CE, CQC Approval

ELECTRICAL SPECIFICATION @ 25°C

Part No	Voltage Regulation	Efficiency	Dimension	Weight	Power
		Typ	DxH	Typ	Rated
	(%)	(%)	(mm)	(Kg)	(VA)
P8TD-80-XXX	8.9	88	93x38	1.10	80
110-XXX	9.1	82	85x62	1.25	110
150-XXX	9.4	88	101x45	1.57	150
200-XXX	11.0	87	111x44	1.83	200
250-XXX	11.0	87	114x48	2.15	250

Mechanical

Schematic (ref only)

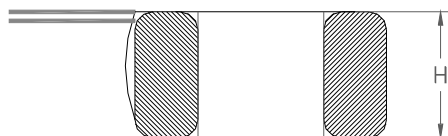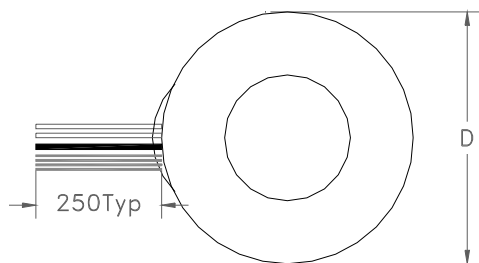

Dimensions

Unless otherwise specified, all tolerances are:

inch: .XX : ± 0.015 .XXX : ± 0.004
mm: X,X : ± 0.38 X,XX : ± 0.10

Product performance is limited to specified parameter. Data is subject to change without prior notice.

P8TD-XXX
0831JW

2463 208th, Ste. 205
Torrance, CA 90501

Phone: (310)533-1455
Fax: (310)533-1853

<http://www.mpsind.com>
Email: sales@mpsind.com