

FLYBACK TRANSFORMER




- RoHS compliant
- For DC-DC switch-mode flyback topology
- Switching frequency to 600KHz
- 10 Watts power handling capability
- ER11/5 platform
- Minimum interwinding breakdown voltage of 1500Vrms

ELECTRICAL SPECIFICATION @ 25°C


Part Number	OCL ($\mu\text{H} \pm 5\%$)	Leakage Inductance ($\mu\text{H typ.}$)	DCR ($\Omega \text{ typ.}$)				Ratio ($\pm 2\%$)	Hi-Pot (mA max.)
	@100KHz 0.1Vrms	@100KHz 0.1Vrms	1-5	7-10	6-9	2-4	@10KHz 1Vrms	@ 1500Vrms 2 sec.
P61455F	4.0	0.13	.013	.030	.026	.044	1:1:1:1	0.5

• Other turns ratios can be developed on request. Please contact MPS Engineering Team for further information.

Mechanical

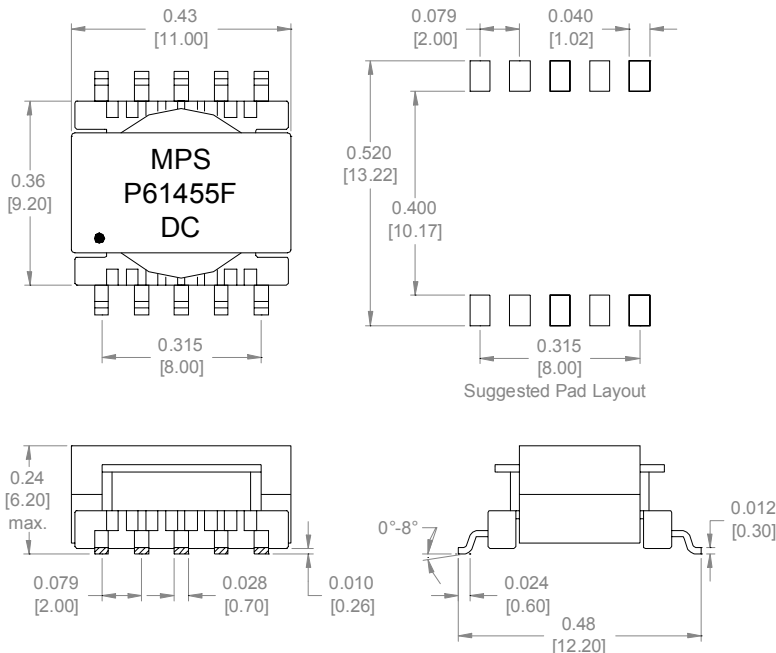

Schematic

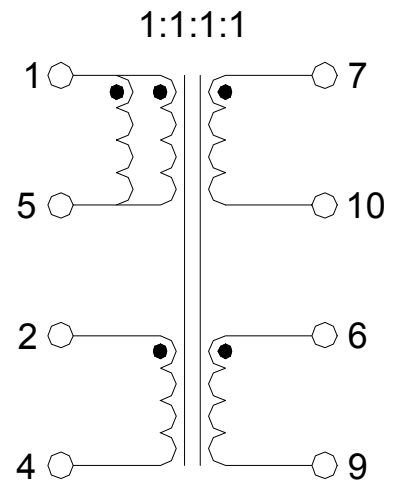

Dimensions

Unless otherwise specified, all tolerances are:
 .XX ± 0.010 " & .XXX ± 0.003 "
 Inches
 [mm]

Product performance is limited to specified parameter. Data is subject to change without prior notice.

P61455F-B
0515TA

2463 208th, Ste. 205
Torrance, CA 90501

Phone: (310)533-1455
Fax: (310)533-1853

<http://www.mpsind.com>
Email: sales@mpsind.com